

Camion fleche 25 Tonnes

Terex Stinger RO-4792C

Boom truck 25 tons

**LOAD RATINGS IN LBS. WITH OUTRIGGERS EXTENDED**

OPERATING LIMITS

AREA OF OPERATION

360° FULL CAPACITY WORK AREA

LOADED BOOM ANGLE	BOOM LENGTH		BOOM LENGTH		BOOM LENGTH		BOOM LENGTH		BOOM LENGTH				
	29 FT	44 FT	57 FT	71 FT	84 FT	92 FT							
4.75	77	50000											
8	71	36800	78	20300									
10	67	30900	75	20300	79	18400							
12	62	26100	73	20300	77	17400							
14	58	21900	70	19400	75	16800	78	14600					
16	53	18800	67	17300	73	15900	77	13800	79	12300			
20	41	14200	61	13900	68	13400	73	12300	76	10900	78	9825	
25	21	10400	53	10900	63	10600	69	10400	73	9800	75	9025	
30			45	8625	57	8625	65	8425	69	8225	71	7425	
35			34	6925	51	6925	60	6925	66	6725	68	6325	
40			19	5225	44	5625	56	5625	62	5625	65	5425	
45					36	4625	50	4625	58	4625	61	4625	
50					26	3725	45	3725	53	3725	57	3725	
55					1	1225	38	3025	49	3025	53	3025	
60							31	2425	44	2425	49	2425	
65							21	2025	39	2025	45	2025	
70									32	1525	40	1525	
75									25	1225	35	1225	
80									14	825	28	825	
		700		500		350		300		250		200	↔ STOWED JIB DEDUCTIONS

**JIB CAPACITIES FOR ALL BOOM LENGTHS**

LOADED BOOM ANGLE	50°	55°	60°	65°	70°	75°	78°	80°
RETRACTED 26 FT JIB	725	1025	1525	2325	3225	4325	4925	5325
EXTENDED 44 FT JIB	425	725	1125	1525	2025	2525	2825	3125

**⚠ DANGER**

READ OPERATOR'S MANUAL BEFORE OPERATING THIS CRANE. THIS CRANE IS NOT INTENDED FOR USE AS A LIFTING DEVICE.

**DEDUCTIONS FROM RATED LOADS FOR HANDLING DEVICES**

OVERHAUL BALL: 175 LBS

1 SHEAVE LOAD BLOCK: 200 LBS


2 SHEAVE LOAD BLOCK: 250 LBS

AUX SHEAVE 50 LBS

NOTE: RATINGS ABOVE THE HEAVY LINE ARE BASED ON STRUCTURAL COMPETENCE AND NOT ON MACHINE STABILITY

**BT-4700 BOOM TRUCK  
OPERATOR'S MANUAL**

**5.3 BT-4792 MODEL SPECIFICATIONS - STOWED**

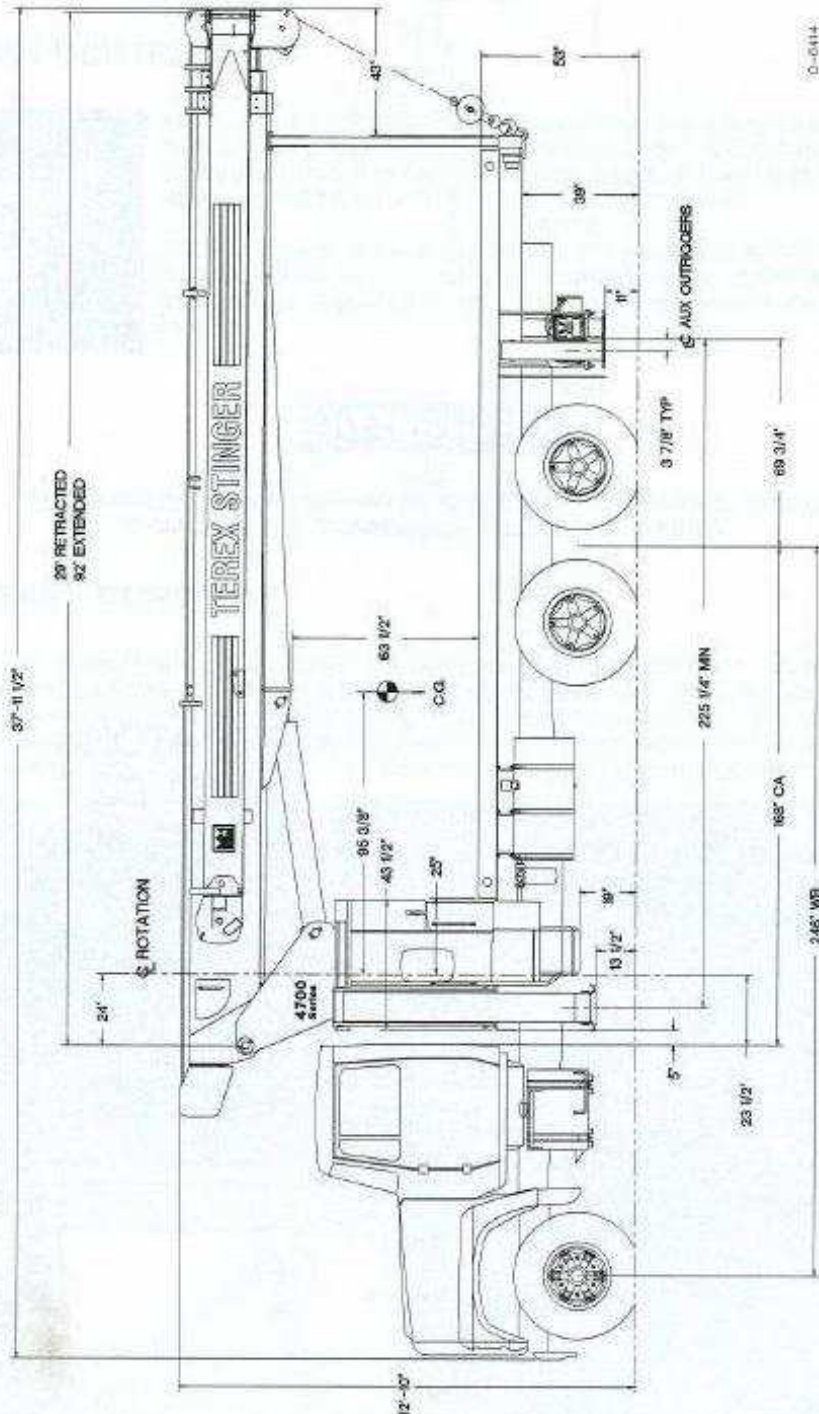

Grue:

**TEREX CRANES**  
Olathe, Kansas

+1 (514) 521 8552

[2a](#)